

## Silverlink 600 Boiling Tops

### Key Features

- Type: Gas
- Countertop units
- Burners with flame failure device
- Manual ignition to burners
- Sealed hobs
- Low level flue
- Nitrile rubber feet



HT9

### Construction

- Body: stainless steel grade 430
- Pan supports: enamelled cast iron

### Available Options


- Natural gas
- Propane gas
- Butane gas
- 2, 4 and 6 burner models

### Available Accessories

- Various pedestals and stands

## Specifications

Model	HT3	HT6	HT9
External height (mm)	305	305	305
External width (mm)	300	600	900
External depth (mm)	600	600	600
Net weight unpacked (kg)	12	22	32
Gross weight packed (kg)	16	28	40
Shipping volume (m <sup>3</sup> )	0.145	0.255	0.286
Heat input per burner Natural (kW)	4.5	4.5	4.5
Heat input per burner Propane (kW)	4.5	4.5	4.5
Heat input per burner Butane (kW)	3.7	3.7	3.7
Total heat input Natural (kW)	9.0	18.0	27.0
Total heat input Propane (kW)	9.0	18.0	27.0
Total heat input Butane (kW)	7.4	14.8	22.2
Gas consumption at full rate Natural (m <sup>3</sup> h <sup>-1</sup> )	0.86	1.72	2.57
Gas consumption at full rate Propane (kg h <sup>-1</sup> )	0.64	1.29	1.93
Gas consumption at full rate Butane (kg h <sup>-1</sup> )	0.54	1.08	1.62
Gas inlet	R <sub>p</sub> ½ (½" BSP)		
Btu/h conversion	kW x 3412		

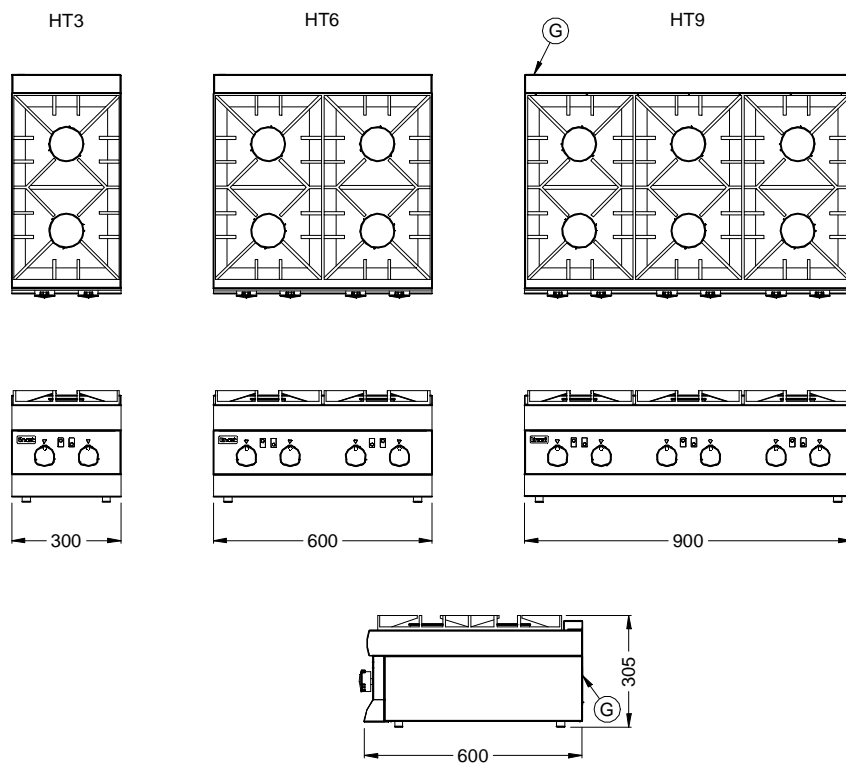

Lincat Limited, Whisby Road,  
Lincoln LN6 3QZ,  
United Kingdom

UK Sales Tel: 01522 875500 UK Spares Tel: 01522 875510 UK General Tel: 01522 875555  
 UK Fax: 01522 875530 International Sales Tel: +44 1522 503250 International Fax: +44 1522 875530  
 Website: www.lincat.co.uk UK Sales e-mail: sales@lincat.co.uk International Sales e-mail: export@lincat.co.uk



Document ref:  
S-LINKGASBOIL  
Issue date: Aug-13